




Assembly Instruction for Stainless Steel Cage # 306, 406

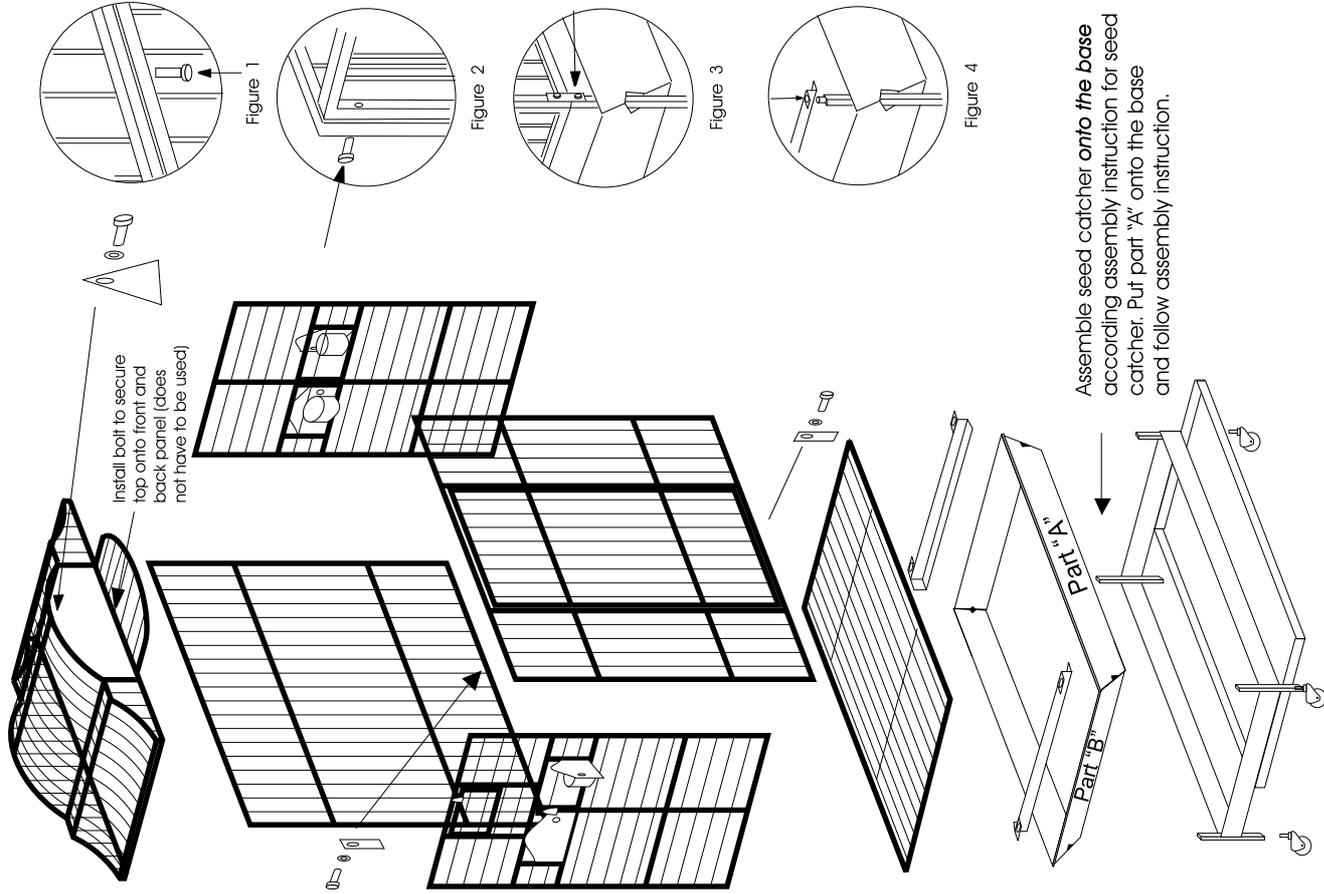

Assembly Instruction for Seed catcher

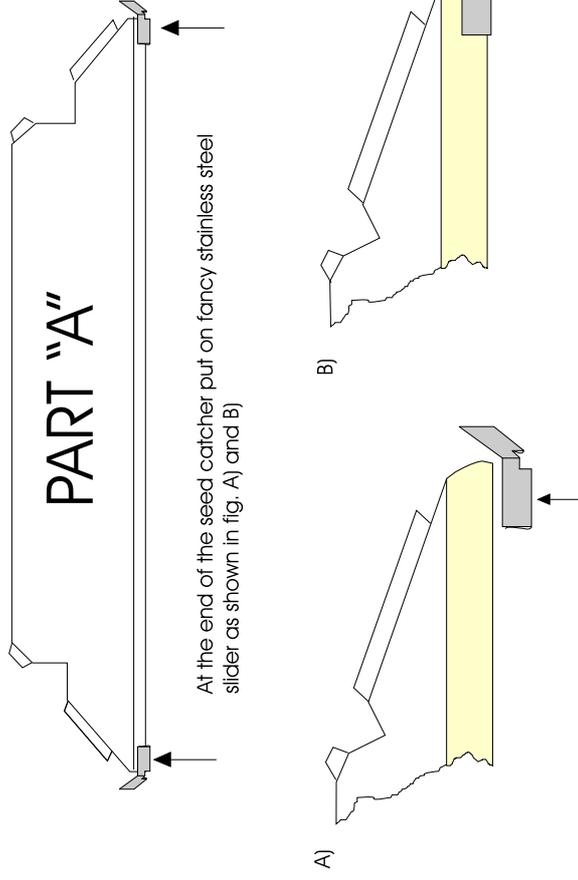

All 4 corners assemble the same way

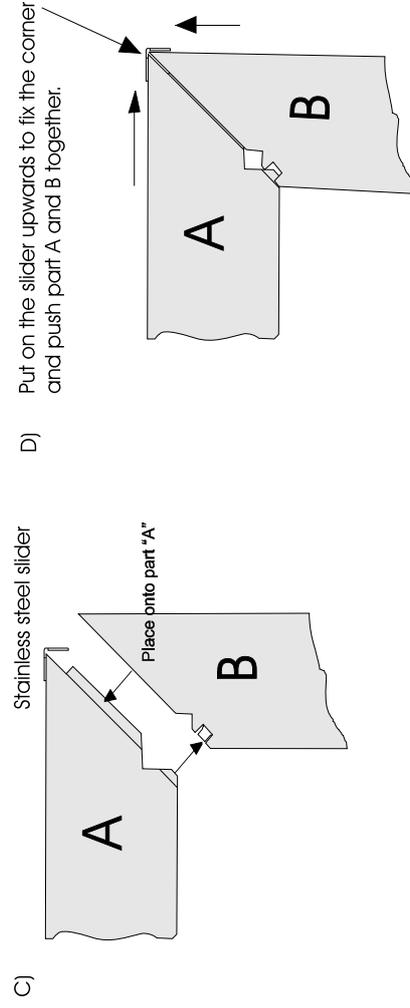

List of components

1 front (door) panel	1 bottom tray
1 back panel	1 perch
1 side (breeder door/swing out feeder) panel	4 caster wheels
1 side (swing out feeders) panel	4 stainless steel cups
1 cage base	2 "L" profiles
1 roof	1 safety latch
1 seed catcher (4 pieces)	bolts
4 sliders for seed catcher	
1 grille (for inside cage)	1 Pad to clean stainless
4 flat pieces of metal with 2 holes each	

1. Insert casters by screwing into the legs with pre-threaded holes on the cage bottom (shorter end at the bottom). Stand in an upright position.

2. Assemble the seed catcher as shown on the drawing onto the base. Sliders, if sometimes loose, can be tightened with squeezing from a pair of pliers.

3. Put the "L" profile onto the base as illustrated in figure 4. Line up all panels in to the position shown and connect the front/back panels to the sides by screwing the painted bolts into the pre-drilled holes on the top half of the panels, as illustrated in figure 2.

Note: Assemble the cage with welds facing inside and openings for the feeders and breeder door at top half of the side panels.

4. Lift the assembled cage body onto the base and line up the flat pieces of metal with 2 holes with the pre-drilled holes at the bottom of the cage body and connect the front/back panels to the base by using shorter unpainted bolts as shown in figure 3.

5. Place the roof on the top by pushing down the extended ends into the tubing of the front/back panels. Use 2 painted bolts to connect the roof to the front/back panels as shown in figure 1.

6. Insert the grille on two L-profiles and place it below the cage and above the seed catcher. Insert the perch in desired position.

7. Insert the cups by pushing them into the rings attached to the swing out feeder door. Note: Cups can only be inserted when the doors are opened! The doors can be opened by moving the swivels to the left or to the right.

8. Attach the safety latch for the front door according to the instruction sheet for safety latch. Stainless rose tighten to the wire the way as shown in figure 5 just as you like it.

9. Shake each part of the cage to make sure that your cage is tight and ready.

For further information please contact:

TERRA INTERNATIONAL, spol. s.r.o.

Grohova 59, 60200 Brno

Tel./Fax.: +420543247313